


## Remote controlled 24 x GPIO - Output

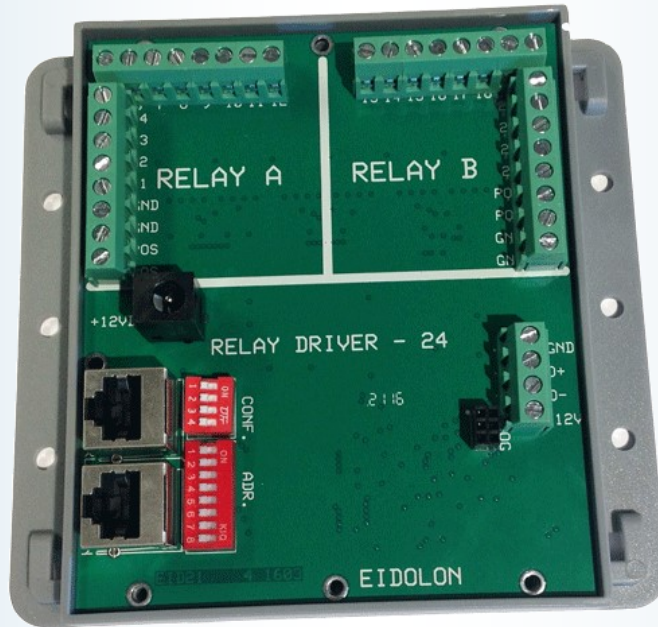

**Eid21 is a remote controlled 24x Genral Purpose Output.**

- Open collector outputs can sink up 1 amp.
- Relay Bank A can use +12 or +24 Volts
- Relay Bank B can use +12 or +24 Volts
- Eid21 has 2 dip switches for control settings.
- 4 bit dip to set unit in Master / Slave and Panel mode.
- 8 bit dip to set unit address: 0x00 is for offline use.
- LAN port in and LAN port out for cascade connection to EidBus.
- ◆ Remote controlled from PC via Eidbus, a modified RS485 bus.
- ◆ +12V dc power. ( can be powered via shielded LAN connection)
- ◆ Easy to use and setup.
- ◆ Control protocol available for custom modification.